



SAMUK ELECTRIC FORKLIFTS

**FBAX 4 WHEEL ELECTRIC LITHIUM ION
FORKLIFT 5 - 7T**

SAMUK

OUR MANUFACTURER

**HYSTER YALE
MAXIMAL
FORKLIFT
CO LTD.**

ZHEJIANG, CHINA



Our entire SAMUK forklift range is manufactured at the Hyster Yale Maximal factory.

Here is some information about our manufacturer:

Established in February 2006, Hyster Yale Maximal is situated in the Lushan Industry Area. They specialises in material handling equipment, design and manufacturing. The facility covers a total floor area of 133,334m² and boasts a production capacity of 30,000 units per year. Maximal have acquired 7 national invention patents and more than 70 utility model and appearance patents.

STATE OF THE ART FACILITIES

Maximal houses the below state of the art facilities:

- Advanced Parts Processing Centre
- Robot Welding Equipment
- Automatic Hoist Conveyor Lines
- Coating Lines
- Assembly Lines
- Forklift Performance Test Lines
- Parts Test-Bed
- ERP Information Management System

M SERIES INTRODUCTION

The M Series is the first generation forklift designed by the Maximal engineering team. The M Series features a world class design thanks to advanced technologies and superior componentry. With its striking appearance, safety and design, the M Series has attracted a worldwide audience.

A SERIES INTRODUCTION

The new A Series forklifts are engineered to provide a higher level of comfort and safety for the driver. The A Series forklifts feature lower noise levels, less vibration and a higher level of safety. Every feature has been carefully designed to ensure an improved driving experience.



SIR NEVILLE BOWMAN-SHAW

We are excited to reintroduce the original budget brand forklift back into the UK market - SAMUK.

Sir Neville Bowman-Shaw built a formidable brand in SAMUK in 1996 during its original guise and we are proud to be at the forefront of bringing this fantastic brand back to the UK market place.



SAMUK

AX SERIES FBAX50-70 Product Features

High Voltage Lithium Batteries

- The on-board voltage platform is 153.6V System nominal voltage is 153.6V
- 12V low voltage system is used to control 153.6V high voltage system, making the whole circuit system more secure
- GB standard connectors are used on high voltage component, the protection grade of the connectors reaches IP65



Permanent Magnet Motor

- Maximum speed up to 6500 RPM
- Using rotary encoder to detect rotation angle, the motor speed can be faster and more accurately controlled at 6500 RPM
- At the same power, the motor size is smaller than the AC motor, which helps save the space



PM Controller

- Permanent magnet controllers and independently researched and developed cable protection connectors are used, whose protection grade reaches IP65
- Permanent magnet controller system can greatly improve driving comfort, make low speed control more accurate and high speed response faster
- Compared with common AC forklift, the service time can be extended by about 20%



Water Cooling System

- The customized motor housing adopts water cooling technology to control the motor temperature below 60°C to achieve heat balance
- The bottom of the controller is made of customized water-cooled aluminum plate with high protection level. The temperature rise of the controller can be controlled below 60°C to ensure the service life of the controller
- Intelligent electronic fan can be automatically turned on and off according to the temperature
- Silent electronic water pump, with the noise level less than 50dB



Reliability

- FEA finite element analysis design, with the strength of internal combustion vehicle frame, providing excellent vehicle reliability
- The gear pump of Italy-imported brand, using special spiral rotor to reduce the output pressure and ensure the efficiency of the oil pump and high reliability
- Drive axle adopts integral shaft structure, with higher strength, more adaptable to all kinds of harsh conditions
- Intelligent water cooling system keeps the maximum temperature of the system below 60°C, greatly increasing its service life

High Efficiency

- Standard equipped batteries can be replaced from the side, which is fast and convenient, improving work efficiency
- With intelligent fast charging, the batteries can be fully charged in 2.5 hours. Competent for various long-term operations of high strength and high load
- Permanent magnet synchronous motor has a protection grade of IP65, provides efficient production efficiency, with the highest efficiency up to 95%

Safety

- High-visibility mast provides great front view
- All cable connections are closed, with great protection performance and high security
- All high pressure components are equipped with safety warning marks for personal warning

Comfort

- The driver's operating position space conforms to the ergonomic design requirements, so that the driver's operation is more comfortable
- Standard vehicle noise is below 70 dB (A)
- Enlarged handle design makes operation more comfortable, more convenient for operators to get on and off the truck

AX SERIES FBAX50-70 Specification

Features	1.1	Manufacturer		HYM	HYM
	1.2	Model		FBAX50-YT2	FBAX70-YT2
	1.3	Drive: battery		Battery	Battery
	1.4	Operator type: seated		Seat	Seat
	1.5	Rated Capacity	Q (kg)	5000	7000
	1.6	Load center	c (mm)	600	600
	1.8	Load Distance	x (mm)	590	590
	1.9	Wheelbase	y (mm)	2300	2300
	Weight	2.1	Service weight	kg	8510
2.2		Axle loading, laden front / rear	kg	11980 / 1530	14900 / 1900
2.3		Axle loading, unladen front / rear	kg	3900 / 4610	4200 / 5600
Wheels and tires	3.1	Tyres: L = pneumatic, V = cushion, SE = Pneumatic Shape Solid		Pneumatic tire	Pneumatic tire
	3.2	Tire size, front		8.25-15-14PR	8.25-15-14PR
	3.3	Tire size, rear		8.25-15-14PR	8.25-15-14PR
	3.5	Number of wheels, front / rear (X=drive wheels)		4x2	4x2
	3.6	Tread, front wheel	b ₁₀ (mm)	1489	1489
	3.7	Tread, rear wheel	b ₁₁ (mm)	1700	1700
	Size	4.1	Tilt of mast / fork carriage forward / backward	degrees	10 / 12
4.2		Height, mast lowered	h ₁ (mm)	2500	2625
4.3		Free lift height	h ₂ (mm)	205	205
4.4		Fork lift height	h ₃ (mm)	3000	3000
4.5		Height, mast extended	h ₄ (mm)	4425	4425
4.7		Height of overhead guard	h ₅ (mm)	2450	2450
4.8		Seat height relating to SIP / stand height	h ₇ (mm)	1400	1400
4.12		Coupling height	h ₁₀ (mm)	345	345
4.19		Overall length	l ₁ (mm)	4715	4830
4.20		Length to face of forks	l ₂ (mm)	3495	3610
4.21		Overall width	b ₁ (mm)	2020	2020
4.22		Fork size	s/e/l (mm)	65 / 150 / 1220	65 / 150 / 1220
4.23		Fork carriage ISO 2328, class / type A, B		ISO 4A	ISO 4A
4.24		Fork carriage width	b ₃ (mm)	1845	1845
4.31		Ground clearance, laden, below mast	m ₁ (mm)	200	200
4.32		Ground clearance, centre of wheelbase	m ₂ (mm)	230	230
4.33		Aisle width for pallets 1000 x 1200 wide	Ast (mm)	5260	5370
4.34		Aisle width for pallets 800 x 1200 long	Ast (mm)	5260	5370
4.35		Turning radius	Wa (mm)	3250	3360
4.36	Internal turning radius	b ₁₃ (mm)	1105	1105	
Performance	5.1	Travel speed, laden / unladen	km/h	19 / 20	19 / 20
	5.2	Lift speed, laden / unladen	mm/s	340 / 400	340 / 400
	5.3	Lowering speed, loaded / unloaded	mm/s	500 / 400	500 / 400
	5.6	Maximum drawbar pull laden / unladen (3 minutes)	KN	45 / 40	45 / 40
	5.8	Gradeability laden / unladen, 30 minute rating	%	20 / 20	20 / 20
	5.10	Service brake		Hydraulic	Hydraulic
Motor	6.1	Drive motor rating	kW	40KW	40KW
	6.2	Lift motor rating	kW	2x20KW	2x20KW
Lithium Battery	6.4	Lithium battery voltage / nominal capacity (5 hours)	V/Ah	352 / 230	352 / 230
	6.5	Lithium battery weight	kg	740	740
	6.5.1	Lithium battery size	l/w/h (mm)	1210 x 630 x 600	1210 x 630 x 600


AX SERIES FBAX50-70 Mast

Mast type	Maximum lift height (mm)	Forward/backward tilting angle Deg (°)		Mast retracted height (mm)		Mast extended height				Free lift height		Load capacity		Front overhang (mm)
		forward tilting	backward tilting	5t	7t	without load support (mm)		with load support (mm)		without load support (mm)	with load support (mm)	Load center (600mm) front Dual Tyres (kg)		
						5t	7t	5t	7t			5t - 7t	5t - 7t	5t
2-stage mast	3000	10	12	2500	2625	3955	4080	4425	4425	205	205	5000	7000	590
	3300	10	12	2650	2775	4255	4380	4725	4725	205	205	5000	7000	590
	3500	10	12	2750	2875	4455	4580	4925	4925	205	205	5000	7000	590
	3750	10	12	2875	3000	4705	4830	5175	5175	205	205	5000	7000	590
	4000	10	12	3050	3175	4975	5100	5425	5425	205	205	5000	7000	590
	4500	6	6	3300	3425	5475	5600	5925	5925	205	205	5000	7000	590
	5000	6	6	3550	3675	5975	6100	6425	6425	205	205	5000	7000	590
	5500	3	6	3850	3975	6525	6650	6925	6925	205	205	4750	6600	590
2-stage full free mast	3000	10	12	2625		4110		4405		1555	1255	5000	7000	600
	3300	10	12	2775		4410		4705		1705	1405	5000	7000	600
	3500	10	12	2875		4610		4905		1805	1505	5000	7000	600
	3750	10	12	3000		4860		5155		1930	1630	5000	7000	600
	4000	10	12	3175		5110		5405		2105	1805	5000	7000	600
3-stage full free mast	4000	6	6	2505		5080		5405		1460	1135	4500	6400	635
	4350	6	6	2630		5430		5755		1585	1260	4500	6400	635
	4500	6	6	2680		5580		5905		1635	1310	4500	6400	635
	4800	6	6	2780		5880		6205		1735	1410	4500	6300	635
	5000	6	6	2880		6080		6405		1835	1510	4500	6300	635
	5400	3	6	3005		6480		6805		1960	1635	4300	6100	635
	6000	3	6	3305		7080		7405		2260	1935	4000	5500	635
	6500	3	6	3530		7580		7905		2485	2160	3500	4700	635




AX SERIES

FBOX50-70 Load Curve

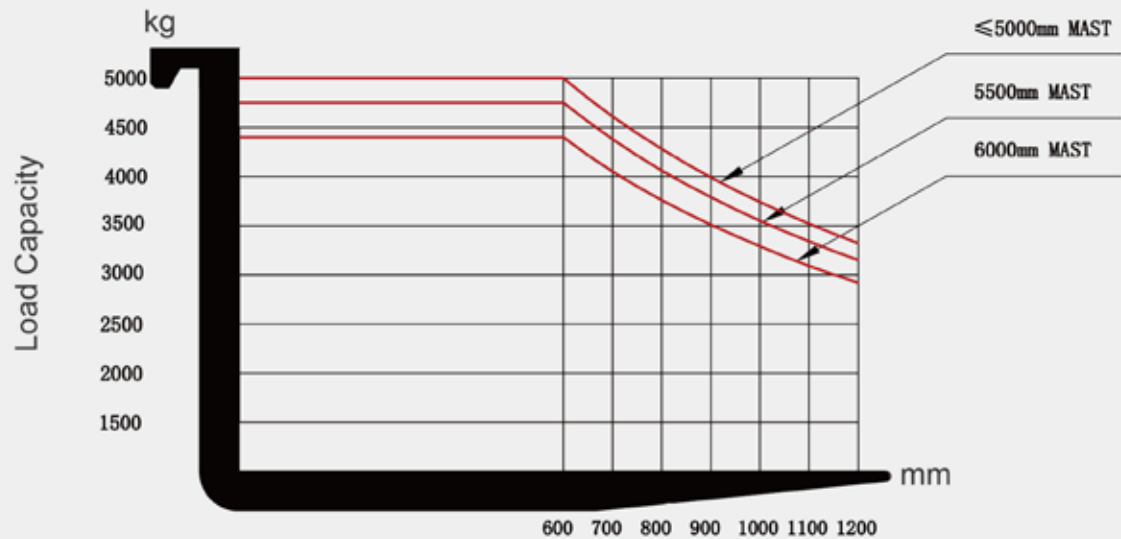


5.0T 2 STAGE MAST LOAD CURVE

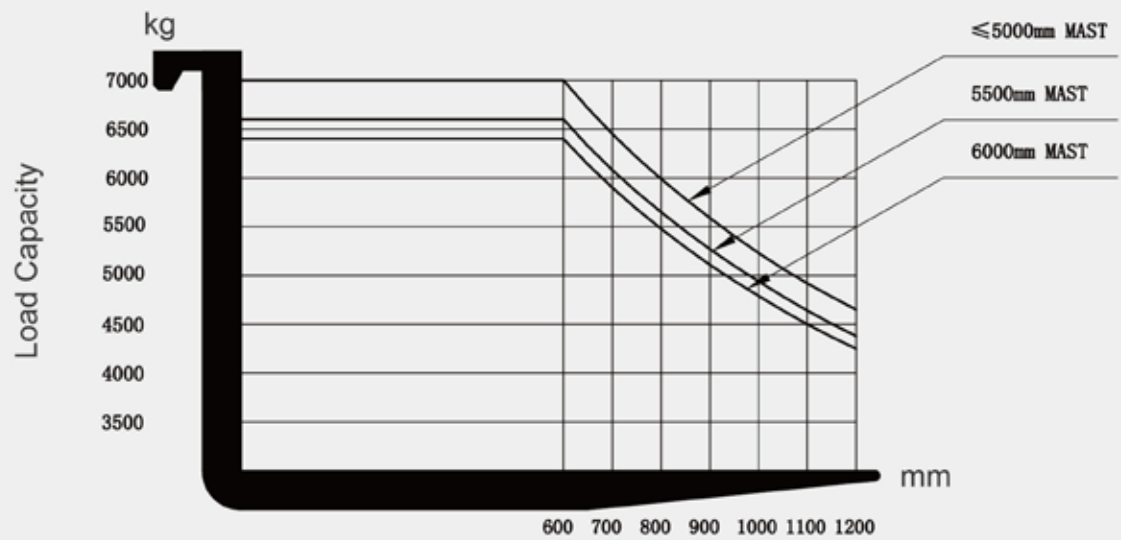

7.0T 2 STAGE MAST LOAD CURVE

AX SERIES FBAX50-70 Dimensions

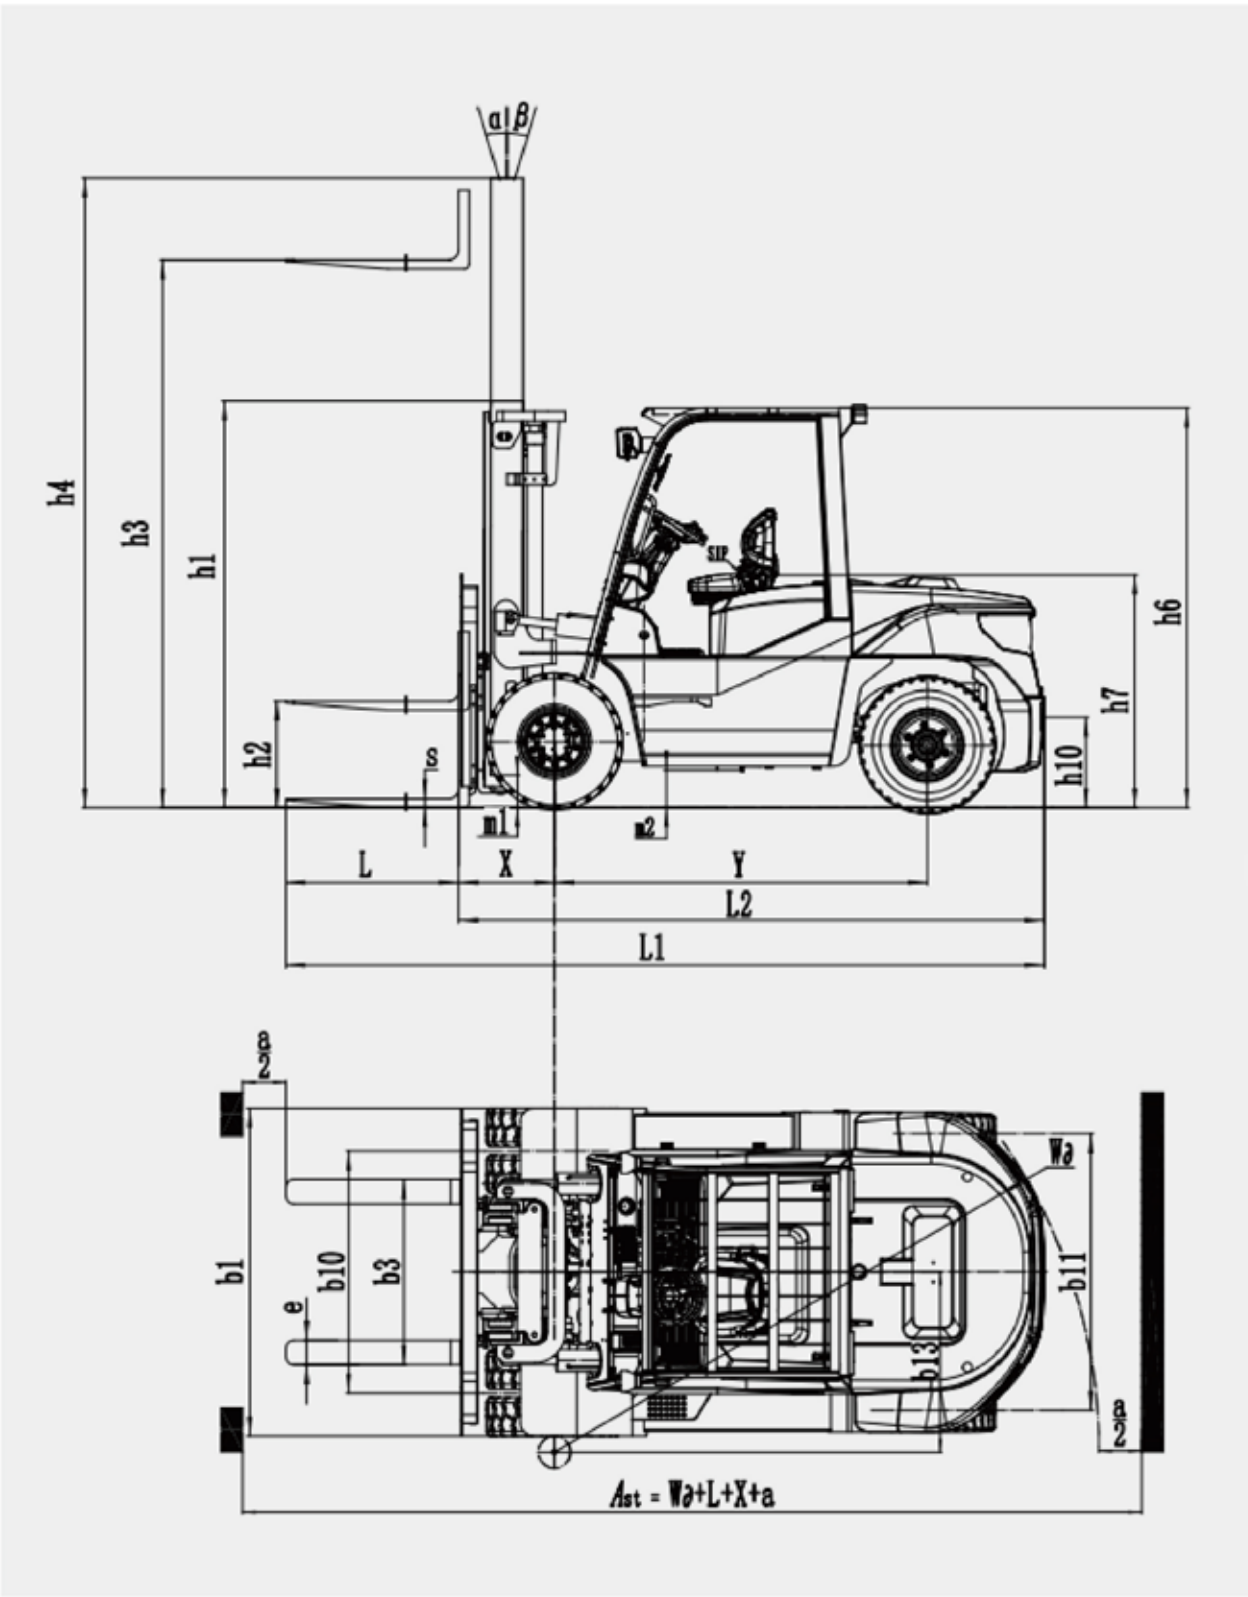

HYSTER / YALE / MAXIMAL FACTORY TIMELINE

2005	Dec	Zhejiang Maximal Forklift Co., Ltd was officially established.
2006	Oct	M series forklifts displayed at the 100th Canton fair.
2007	Nov	Maximal phase I project of the new factory finished.
2008	Jan	Structure of electric forklift was further optimized.
	Nov	Maximal was appointed by the General Logistics Department of the People's Liberation Army(PLA) to be supplier for Military Equipment.
2009	Mar	4.0T&5.0T and 8.0-10.0T diesel forklift were launched to enrich M Series.
	May	Maximal started to prepare the R&D of 16.0-18.0T diesel forklift.
2010	Nov	The first 4.5T electric forklift and 25.0T heavy duty forklift were displayed on Shanghai CeMAT.
	Dec	Maximal and Military Transportation University reached
2012		Maximal was honored as "state-level high-tech enterprise".
2013	May	Maximal 2WD 2.5/3.5T Rough Terrain forklift was launched to the market.
	July	Maximal Empty Container Handler was officially developed.
2014	Jun	Maximal electric stackers & pallet trucks were put into market.
	Aug	Maximal 2WD Rough Terrain forklift were extended to 4.0/5.0T.
	Dec	Maximal phase II project was finished.
2015	May	Maximal 3.5T 4WD Rough Terrain forklift was successfully developed. First Reach Stacker successfully was sold in domestic market.
	July	Maximal won the Chinese well-known trademark.
2016	Oct	1.8-3.5T C. 4WD Hydraulic rough terrain forklift was successfully launched.
	July	3.5-4.5T Sider-loader forklift was lanuched; Electric forklift with lithium battery started to be developed; 1.6-2.5T A series Reach truck was lanuched.
2018	June	Hyster-Yale and Maximal officially completed its acquisition, Maximal began a new start.
	July	



The Forklift Company Limited
Units 1-4
Knowle Hill Business Park
Hurley
Atherstone
CV9 2JE

T: 01827 874728
 E: sales@theforkliftcompany.net
 www.theforkliftcompany.net
 Company Number: 06625806



MANUFACTURER'S ADDRESS

Hyster Yale Maximal Forklift Co Ltd
No.1 Jinxin Road
Lushan Industrial Area
Fuyang
Zhejiang
China

